
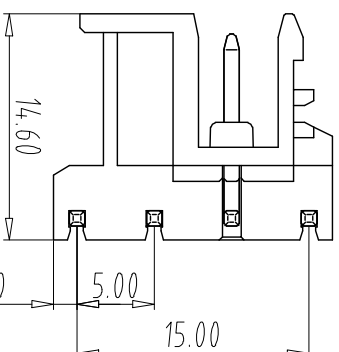
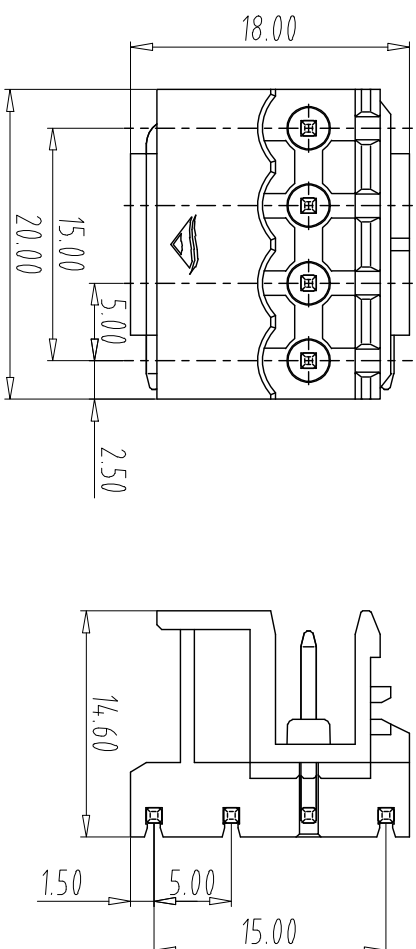


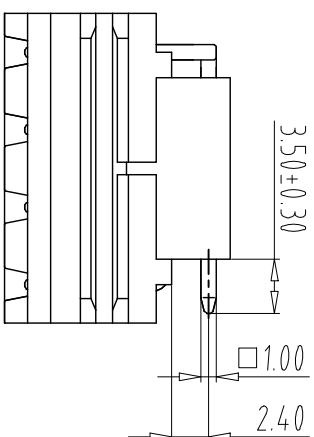

NOTES:
UL Standard

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

2.withstanding voltage: AC2000V/1Min
IEC Standard

1.	Pollution Degree	2
	Overvoltage Category	III
	Rate Impulse Voltage(KV)	4.0KV
	Rate Voltage(V)	320V
	Rate Current(A)	20A

NOTES:

1. Housing: PA66(UL 94 V-0)
2. Solder Pin1: Copper(Sn Plated)
3. Solder Pin2: Copper(Sn Plated)
4. Solder Pin3: Copper(Sn Plated)
5. Solder Pin4: Copper(Sn Plated)